

Samsung
SMART Home

smart answer

Samsung SDS
smart home
catalog

Samsung
SMART Home




Why Samsung smart home?



The leading brand in the field of home network

Starting with the world's first commercialization of the home network systems, our products are ranked first in the brand loyalty research and the customer satisfaction research.

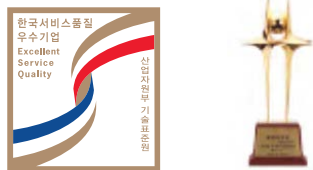

Customer-centered quality and service

We are doing our best to provide the best product quality and services to customers. The Certificates for Excellent Service Quality, Quality Management Awards, and the Grand Prize for the Service are the results of our efforts.



The best partner specialized in comprehensive networks

As comprehensive network system providers with the best technology for overall systems, the company has the certificates of a world-class products enterprise, have been ranked first for seven successive years in the IT construction capability evaluation, and have been awarded the ISO 9001 certificates.



High-quality design pursuing the values

Our excellence in design is well recognized through various awards, including the world-renowned 'iF Design Award', the 'iF Material Award', 'Red dot Design Award' and 'IDEA Design Award'. We are still pursuing trendy design from customer's perspective.

Always on, Connected home




SHN-8610XM



Features

- 10.1" color digital LCD screen
- Touch screen with flash animation
- Home control (lighting, gas valve, air conditioner, etc.)
- System integration (optional) (parking control, CCTV, etc.)
- News, weather, announcement, etc. (optional)
- Slim & flush mounting type
- Door answering & monitoring
- Door release
- Security (burglar, fire, gas leakage, etc.)
- Intercommunication (guard office, households)
- Visitor image capture

System Configuration

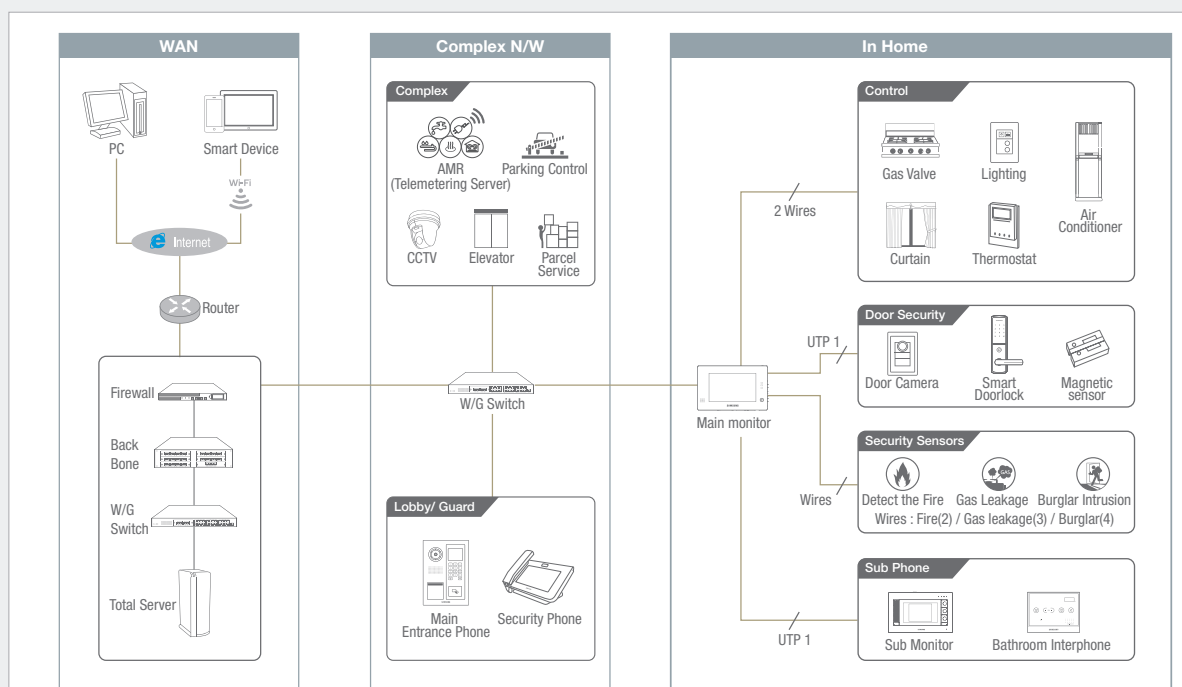


*Expandable up to 4 sub monitors and 1 door camera

Specifications

Power	DC17V~24V
Power Consumption	30W
Display	10.1" Color digital LCD & Touch screen
Dimension	330 x 209 x 17 mm (WxHxD)
Weight	1.5kg
Installation	Flush mounting
Type	Hands-free Type

*Flush mounting box sold separately


Dimensions

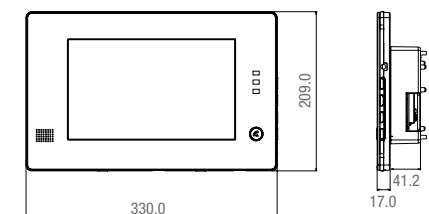

Product Components

Model Code	Description
SHN-8610XM/EN	Monitor
SHT-T8610XM/TW	Terminal Board
SHT-EIF200/TW	Interface Board
-	Door Camera
SHT-IRSD	Motion Detector
SHT-SBNC	Magnetic Sensor
SHT-SGLD2/KR LN	Gas Leakage Detector
SHT-ZBXSD	Monitor Flush Mounting Box
SHT-ZMC7D	Flush Mounting Box Cover
SHT-ZBX5C	Camera Flush Mounting Box
SHN-5181XL/EN	Main Entrance Phone
SHN-587XS	Security Phone

Mounting Diagram

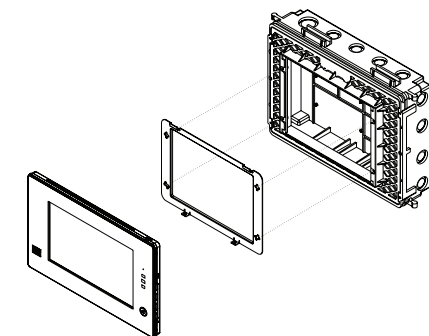


SHT-7610XM



Features

- 10.1" color digital LCD screen
- Touch screen with flash animation
- Slim & minimal flush mounting type
- Door answering & monitoring
- Door release
- Home control (lighting, gas valve, air conditioner, etc.)
- System integration with CCTV
- Intercommunication (guard office, households)
- Security (burglar, fire, gas leakage, etc.)
- Visitor image capture
- Multi language support (English, Chinese, Taiwanese, Russian)

System Configuration

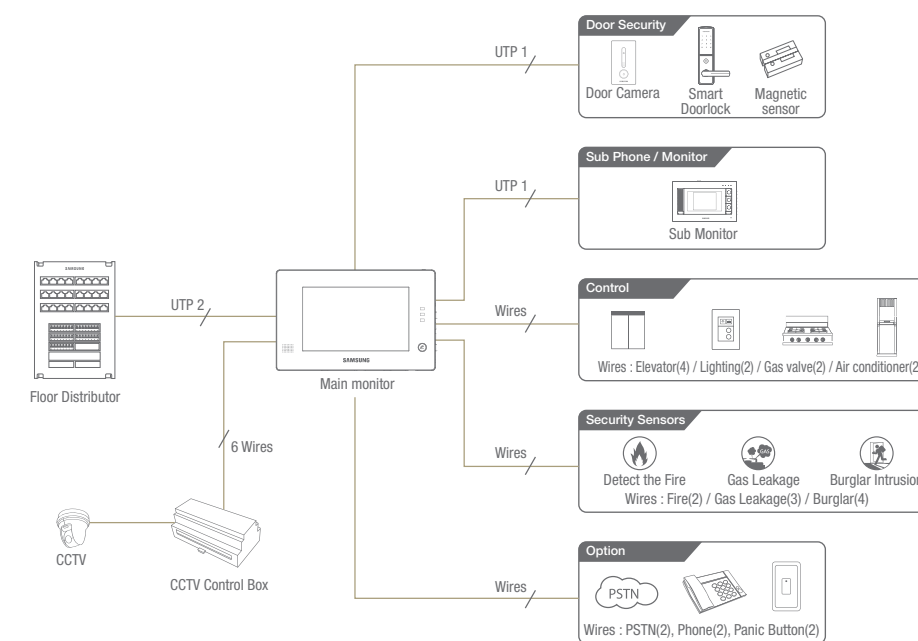


* Expandable up to 4 sub monitors, 1 door camera, and 4 CCTV camera

Specifications

Power	DC17V~24V
Power Consumption	30W
Display	10.1" Color digital LCD & Touch screen
Dimension	330 x 209 x 17 mm (WxHxD)
Weight	1.5kg
Installation	Flush mounting
Type	Hands-free Type


Dimensions

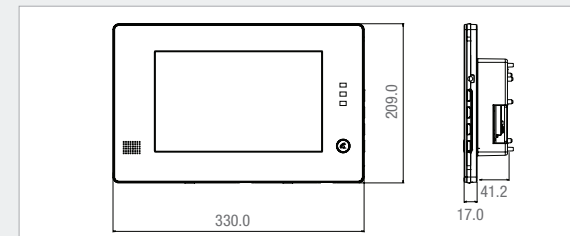

Product Components

Model Code	Description
SHT-7610XM/EN	Monitor
SHT-T8610XM/TW	Terminal Board
SHT-EIF200/TW	Interface Board
-	Door Camera
SHT-ZCT004/TW	4Chanel CCTV Control Box
-	CCTV
SHT-IRSD	Motion Detector
SHT-SBNC	Magnetic Sensor
SHT-SGLD2/KR LN	Gas Leakage Detector
SHT-5181XL/EN	Main Entrance Phone
SHT-587XS	Security Phone
SHT-5800	Main Control Unit
SHT-ZBXSD	Monitor Flush Mounting Box
SHT-ZMC7D	Flush Mounting Box Cover
SHT-ESCA1A	Communication Board

Mounting Diagram

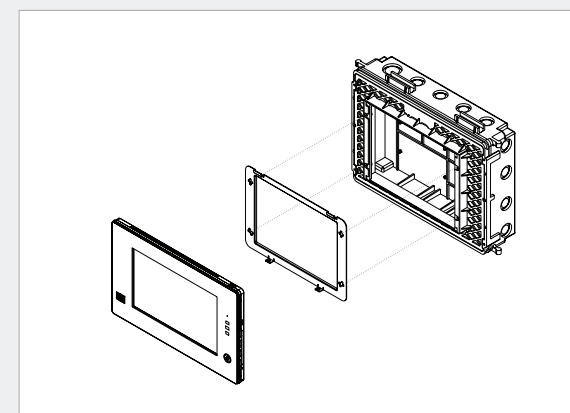


SHT-7507XM



Features

- 7" Wide color LCD screen
- Door answering & monitoring
- Door release
- Security (Gas leakage, etc.)
- Intercommunication(guard office, households)
- Navigation button
- Announcement /notification
- Visitor image capture


System Configuration

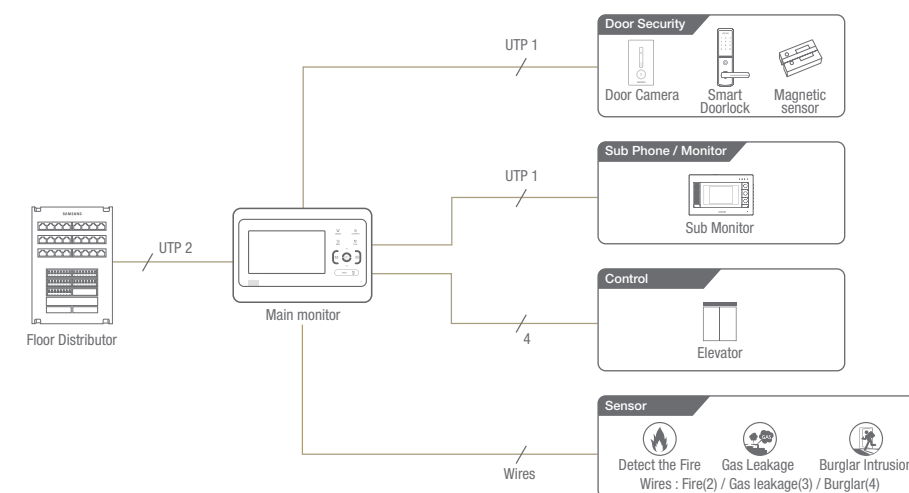

Specifications

Power	UPS INPUT DC 17V~24V
Power Consumption	15W
Display	7" Wide Color TFT LCD
Dimension	283 x 192 x 29.5 mm (WxHxD)
Weight	1.8kg
Installation	Wall mounting
Type	Hands-free Type


Dimensions

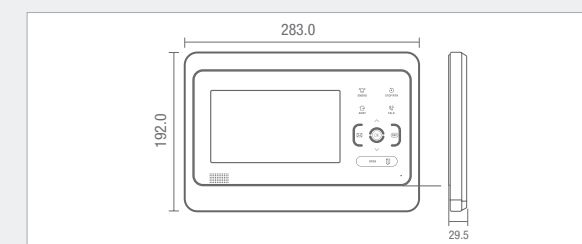

Product Components

Model Code	Description
SHT-7507XM/EN	Monitor
-	Door Camera
SHT-IRSD	Motion Detector
SHT-SBNC	Magnetic Sensor
SHT-SGLD2/KR LN	Gas Leakage Detector
SHT-ZBXCB	Camera Flush Mounting Box
SHT-5181XL/EN	Main Entrance Phone
SHT-587XS/EN	Security Phone
SHT-5800	Main Control Unit

Mounting Diagram

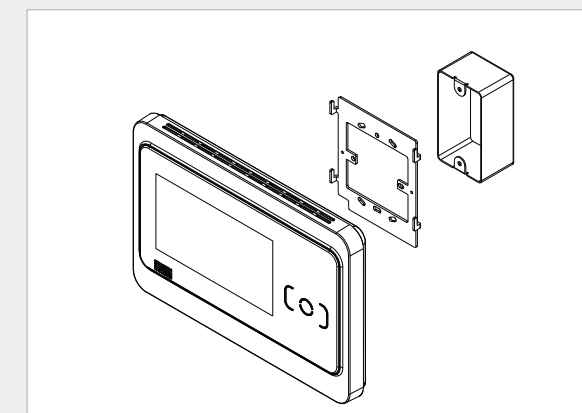


SHT-7017XM



Features

- 7" color digital LCD screen
- Slim & wall mounting type (22mm)
- Touch screen
- Door answering & monitoring
- Security
- Intercommunication (guard office, households)

System Configuration

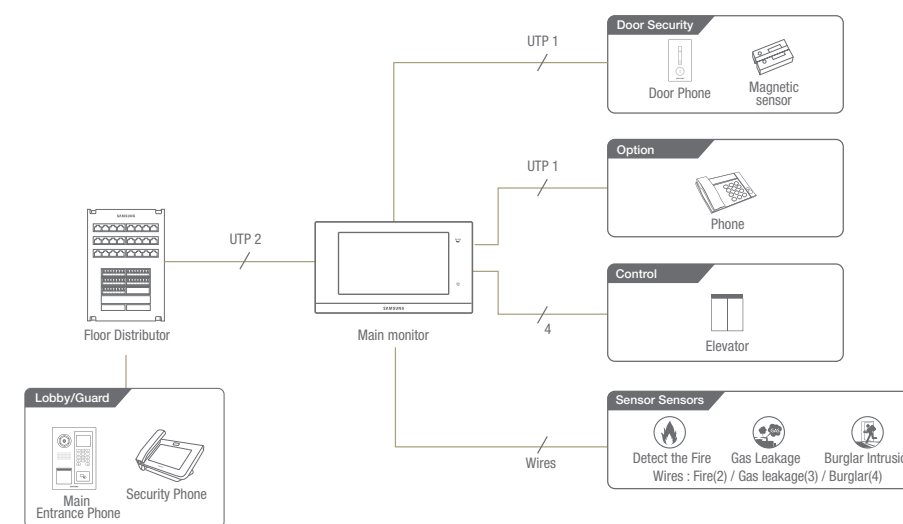


* Expandable up to 1 door camera

Specifications

Power	DC 12V or UPS (17V~24V)
Power Consumption	8W
Display	7" Color Digital LCD
Dimension	258 x 145 x 21.5mm (WxHxD)
Weight	672g
Installation	Wall mounting
Type	Hands-free Type


Dimensions

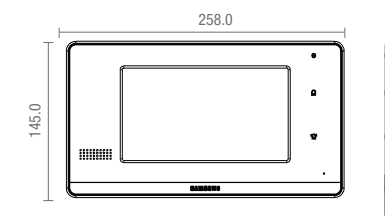

Product Components

Model Code	Description
SHT-7017XM/EN	Monitor
-	Door Camera
SHT-IRSD	Motion Detector
SHT-SBNC	Magnetic Sensor
SHT-SGLD2/KR LN	Gas Leakage Detector
SHT-ZBXCB	Camera Flush Mounting Box
SHT-5181XL/EN	Main Entrance Phone
SHT-587XS	Security Phone
SHT-5800	Main Control Unit

Mounting Diagram

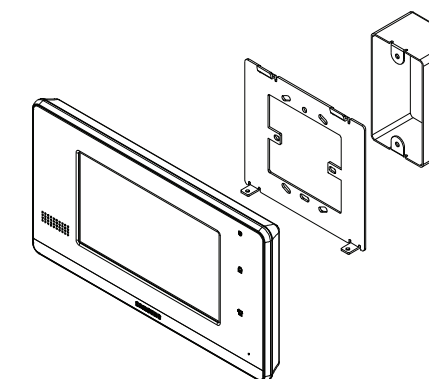


SHT-3507DM



Features

- 7" color digital LCD screen
- Door answering & monitoring
- Door release
- Intercommunication (guard office, households)
- Security (burglar)


System Configuration

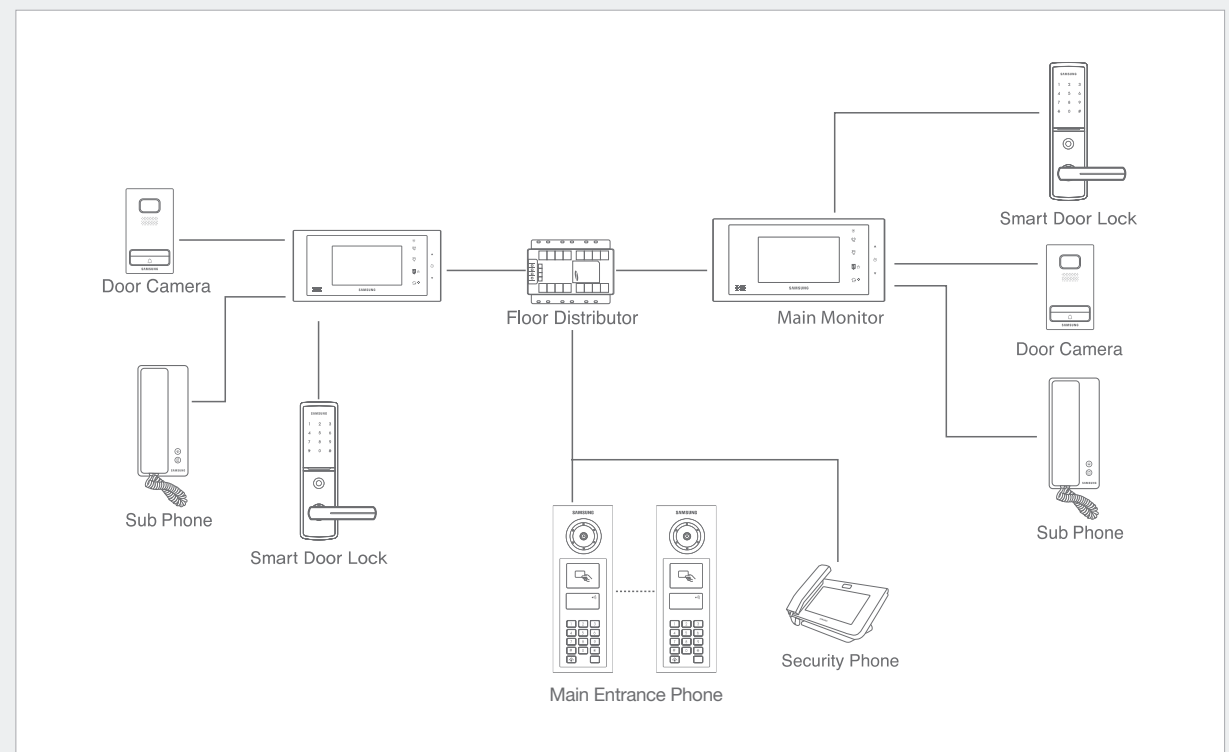

Specifications

Power	DC17V~24V
Power Consumption	10W
Display	7" Color Digital LCD
Dimension	292 x 162 x 25 mm (WxHxD)
Weight	1.5kg
Installation	Wall mounting
Type	Hands-free Type


Dimensions

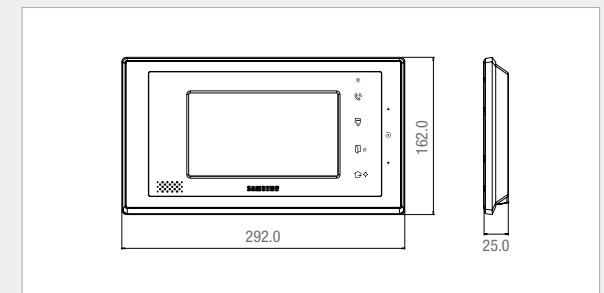

Product Components

Model Code	Description
SHT-3507DM/EN	Monitor
-	Door Camera
SHT-5081NL/EN	Main Entrance Phone
SHT-IPE101/EN	Sub Phone
SHT-587XS/EN	Security Phone

Mounting Diagram

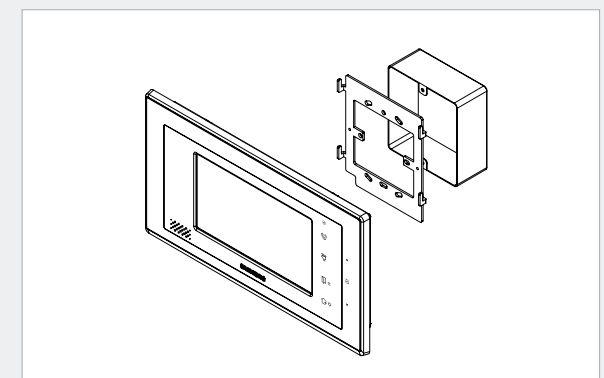


SHT-3006XM



Features

- 6" color LCD screen
- Door answering & monitoring
- Door release
- Intercom call between a video monitor and sub phone

System Configuration

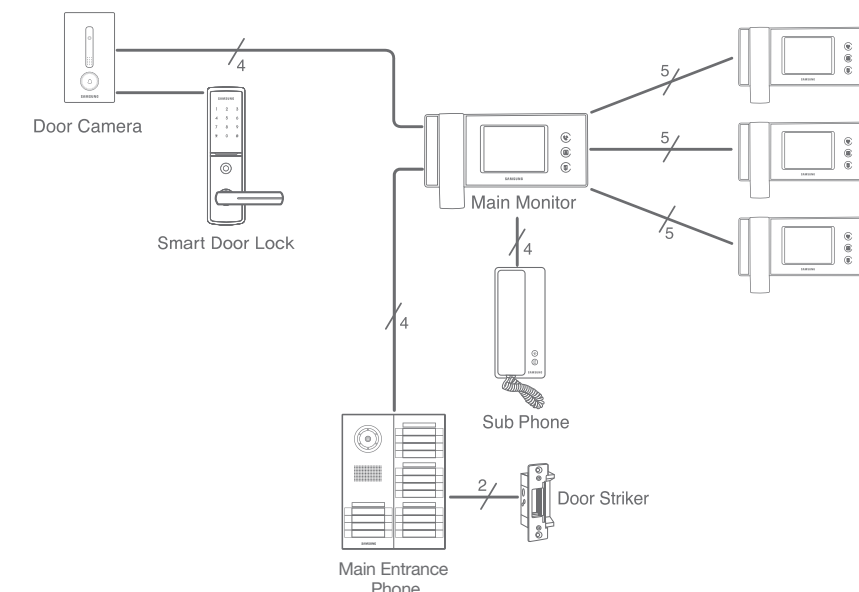


*Expandable up to 3 monitors, 2 door cameras

Specifications

Power	AC110~220V (50~60Hz)
Power Consumption	7W
Display	6" Color TFT LCD
Dimension	278 x 130 x 37 mm (WxHxD)
Weight	1.05kg
Color	Crystal Black(3006XM), Natural White(3006XMW)
Installation	Wall mounting
Type	Handset Type


Dimensions

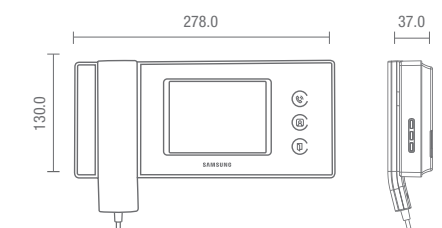

Product Components

Model Code	Description
SHT-3006XM/EN SHT-3006XMW/EN	Monitor
-	Door Camera
SHT-IPE101/EN	Sub Phone
SHT-5088ML/EN	Main Entrance Phone

Mounting Diagram

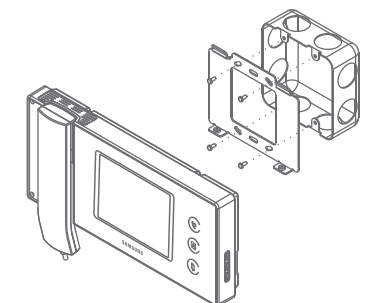


SHT-3605PM



Features

- 4.3" color digital LCD screen
- Door answering & monitoring
- Door release
- Intercom call between a video monitor and Sub monitor

System Configuration

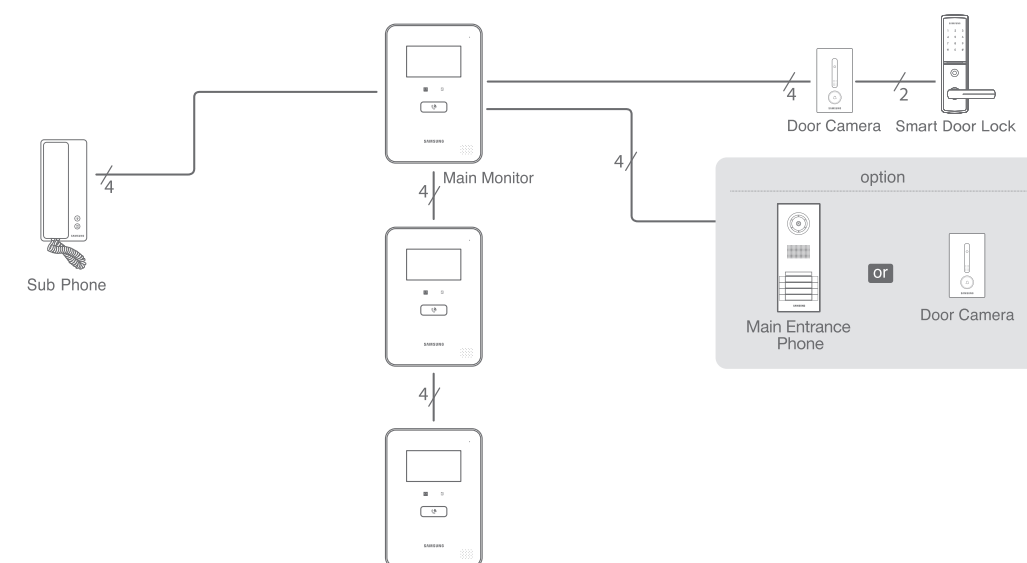


* Expandable up to 2 monitors and 2 door cameras.

* If 2 door cameras used, the main monitor and sub monitor will require 7-cables.

Specifications

Power	AC110~220V (50~60Hz)
Power Consumption	7.5W
Display	4.3" Color Digital LCD
Dimension	172 x 246 x 25 mm (WxHxD)
Weight	600g
Color	Black
Installation	Wall mounting
Type	Hands-free Type


Dimensions

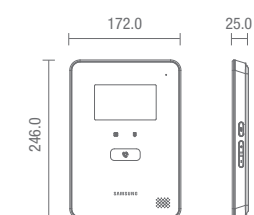

Product Components

Model Code	Description
SHT-3605PM/EN	Monitor
SHT-CW610E/EN	Door Camera
SHT-IPE101/EN	Sub Phone
SHT-5088ML/EN	Main Entrance Phone

Mounting Diagram



Product List

	Home Network System	Video Intercom System		
	SHN-8610XM	SHT-7610XM	SHT-7507XM	SHT-7017XM
Model				
Display	10.1" Color digital LCD	10.1" Color digital LCD	7" Color LCD	7" Color Digital LCD
Type	Hands-free	Hands-free	Hands-free	Hands-free
Door Release	O	O	O	O
Security	O	O	O	O
Camera Expandable	1	1	1	1
Intercommunication (Guard office)	O	O	O	O
Intercommunication (Households)	O	O	O (Via Security Office)	O
PSTN	O	O	X	X
Image Save	O	O	O	X
Installation	Flush mounting	Flush mounting	Wall mounting	Wall mounting

* All of the above Video Intercoms can be used with a main entrance phone.

	Video Intercom System	Video Intercom	
	SHT-3507DM	SHT-3006XM	SHT-3605PM
Model			
Display	7" Color digital LCD	6" Color LCD	4.3" Color Digital LCD
Type	Hands-free	Handset	Hands-free
Door Release	O	O	O
Security	O	X	O
Camera Expandable	1	2	1
Intercommunication (Guard office)	O	X	X
Intercommunication (Households)	O (Via Security Office)	X	X
PSTN	X	X	X
Image Save	X	X	X
Installation	Wall mounting	Wall mounting	Wall mounting

Smart Door Lock

		Smart Door Lock with handle				
		SHS-P718	SHS-P717	SHS-H705	SHS-H635	SHS-H625
Modle						
Capacity (Password)		31	31	11	1	1
Capacity (RF ID card)				X	20	20
Capacity (Finger print)		100	X	100	X	X
Random Security Code		O	O	O	O	O
Mechanical Override Keys		O	O	O	O	O
Lockset		Mortise Lock	Mortise Lock	Mortise Lock	Mortise Lock	Mortise Lock
Applicable Door Depth		38~80mm (1.5~2.0inch)	38~80mm (1.5~2.0inch)	40~80mm (1.6~3.1 inch)	40~80mm (1.6~3.1 inch)	40~80mm (1.6~3.1 inch)
Material		Zn, Al, ABS	Zn, Al, ABS	Zn, Al, ABS	Zn, Al, ABS	Zn, Al, ABS
Humidity		20~80%	20~80%	20~80%	20~80%	20~80%
Temperature		-20°C~ +55°C	-20°C~ +55°C	-20°C~ +55°C	-20°C~ +55°C	-20°C~ +55°C
Power		DC 6V AA Alkaline Battery (8)	DC 6V AA Alkaline Battery (8)	DC 6V AA Alkaline Battery (8)	DC 6V AA Alkaline Battery (8)	DC 6V AA Alkaline Battery (8)
Color		Black	Black	Black, Gold, Pink gold	Silver, Gold	Black
Battery Life		About 12 Months (Ten Times Per Day)	About 12 Months (Ten Times Per Day)	About 10 Months (Ten Times Per Day)	About 12 Months (Ten Times Per Day)	About 12 Months (Ten Times Per Day)
Product Size (WxHxD)mm	Exterior body	85x385x61(mm) 3.3x 15.2x2.4(inch)	85x346.5x61(mm) 3.3x 13.6x2.4(inch)	81.3x318x75(mm) 3.2x 12.5x3.0(inch)	81x306x64(mm) 3.2x 12.0x2.5(inch)	82x299x66.5(mm) 3.2x 11.8x2.6(inch)
	Interior body	86x354.8x63(mm) 3.4x 14.0x2.5(inch)	86x354.8x63(mm) 3.4x 14.0x2.5(inch)	79x290x80(mm) 3.2x 11.4x3.1(inch)	79x290x80 (mm) 3.2x 11.4x3.1(inch)	79x290x80(mm) 3.2x 11.4x3.1(inch)

* All of the SAMSUNG Smart Door Locks above are interoperated with the Samsung Video Intercom (System), and Samsung Home Network System.

* The Battery Life could be different according to installation, battery, and frequency of usage.

Smart Door Lock with handle	Smart Door Lock without handle				
SHS-H505	SHS-3220	SHS-3321	SHS-2320	SHS-1321	SHS-G517
					
31	71	71	1	1	71
			20	20	
X	X	X	X	X	X
O	O	O	O	O	O
O	O	X	X	X	X
Mortise Lock	Tubular lock	Tubular lock	Rim lock (Double claw Bolt)	Rim lock	Rim lock
40~80mm (1.6~3.1 inch)	35~55mm (1.4~2.2 inch)	35~55mm (1.4~2.2 inch)	40~50mm (1.6~2.0inch)	40~50mm (1.6~2.0 inch)	9~13mm (0.4~0.5 inch)
Zn, Al, ABS	Zn, Al, Polycarbonate	Zn, Al, Polycarbonate	Al, Acrylate, NBR Polycarbonate, SUS	Zn, Al, ABS Plastic	Zn, ABS, Al
20~80%	20~80%	20~80%	20~80%	20~80%	20~80%
-20°C~ +55°C	-20°C~ +60°C	-20°C~ +60°C	-20°C~ +60°C	-20°C~ +60°C	-20°C~ +60°C
DC 6V AA Alkaline Battery (8)	DC 6V AA Alkaline Battery (4)	DC 6V AA Alkaline Battery (4)	DC 6V AA Alkaline Battery (4)	DC 6V AA Alkaline Battery (4)	DC 6V AA Alkaline Battery (4)
Black	Black	Black	Black	Black	Black
About 18 Months (Ten Times Per Day)	About 12 Months (Ten Times Per Day)	About 12 Months (Ten Times Per Day)	About 10 Months (Ten Times Per Day)	About 10 Months (Ten Times Per Day)	About 10 Months (Ten Times Per Day)
82x302.4x66.1(mm) 3.2x 11.9x2.6 (inch)	68x180x36.5(mm) 2.7x 7.1x1.4 (inch)	68x180x36.5(mm) 2.7x 7.1x1.4 (inch)	65.2x170.5x22.5 (mm) 2.6x6.7x0.9 (inch)	69x175x22 (mm) 2.7x6.9x0.9 (inch)	78x173.4x18.1 (mm) 3.1x6.8x0.7 (inch)
79x290x80(mm) 3.2x 11.4x3.1(inch)	68x180x38.3(mm) 2.7x 7.1x1.5 (inch)	68x180x38.3(mm) 2.7x 7.1x1.5 (inch)	182x90x40.7 (mm) 7.2x3.5x1.6 (inch)	181x92x48(mm) 7.2x3.6x1.9 (inch)	72.7x171.1x45.3 (mm) 2.9x6.7x1.8 (inch)

Entrance Facility Products

Main Entrance Camera Phone



SHT-5081NL

- Door access control (User access code& RF card)
- LCD Screen
- Applicable for single family homes and apartments (60 households)

Product Components

Monitor
SHT-3507DM

Specifications

Contents	Description
Power	DC 17V ~ 24V
Camera Sensor	1/3" Color (270k Pixel)
Power Consumption	520mA
Display	Dots LCD (122x32mm)
Dimension	124x347x18mm (WxHxD)
Installation	Flush Mounting
IP Rate	IPX3
Type	Hands-free Type



SHT-5084ML (4 Button) SHT-5088ML (8 Button)

- Door access control
- Call to households



SHT-5008EP (8 Button) SHT-5016EP (16 Button) SHT-5024EP (24 Button)

Specifications

Contents	Description
Power	DC 12V,330mA (Max)
Camera Sensor	1/3" Color (320k pixel)
Power Consumption	230mA
Dimension	123x308x18mm (WxHxD)
Installation	Flush Mounting
IP Rate	IPX3
Type	Hands-free Type

Product Components

Monitor
SHT-3006XM, SHT-3605PM



SHN-5181XL SHT-5181XL

- Door access control (User access code &RF ID card)
- Call to households
- Visitor's image save (SHN-5181XL)

Product Components

Item	Monitor
SHN-5181XL/EN	SHN-8610XM
SHT-5181XL/EN	SHT-7610XM, SHT-7507XM, SHT-7017XM

Specifications (SHN-5181XL)

Item	Contents	Description
Power	Input Power	DC 12V (SHT-PS17X) or UPS
	Sensor	1/3" CCD, 410k Pixel (PAL)
Camera	Power consumption	100mA
	Type	Speaker Phone (VoIP)
Communication	Transmission	Ethernet
	Image Transmission	Ethernet
Dimension		223x320x13mm (WxHxD)
Flush mounting		SHT-ZBXSD SHT-ZCXA500
IP Rate		IP54

Specifications (SHT-5181XL)

Item	Contents	Description
Power	Input Power	DC 12V (SHT-PS17X) or UPS
	Sensor	1/3" CCD, 410k Pixel (PAL)
Camera	Power consumption	100mA
	Type	Speaker Phone (Analog)
Communication	Transmission	RS-485
	Image Transmission	Analog
Dimension		223x320x13mm (WxHxD)
Flush mounting		SHT-ZBXSD SHT-ZCXA500
IP Rate		IP54

Security Phone



SHN-587XS SHT-587XS

- 7" Touch screen
- Communication with Main Entrance Phone on the Video
- Call to households, Receiving emergency situation
- Intrusion alarm
- Away Mode
- Door access control
- Parcel service notification (SHN-587XS)

Specifications

Item	Description
Power	DC 12V, AC110~220V (50~60Hz)
Transmission	SHN-587XS : VoIP, SHT-587XS : RS-485
Display	7" color TFT LCD & Touch screen
Size	255 x 140 x 153mm (WxHxD)

Product Components

Item	System
SHN-587	Home Network System
SHT-587	SHT-5800 System, SHT-5081 System

Door Camera

* Cameras are compatible with all monitors.



SHT-CN610E SHT-CN620E SHT-CN640E

- Metal color door camera

Product Components

Monitor
SHT-3006XM, SHT-3507DM, SHT-3605PM SHT-7610XM, SHT-7507XM, SHN-8610XM

* SHT-CN610E door release available only with SHT-3006XM,SHT-3507DM

Specifications

Item	Contents	Description
Power	Input Power	DC12V/150mA (for 1ch)
	Power Consumption	90mA (MAX)
Camera	Sensor	1/4" CCD Color (320k Pixel)
	Lens	2.3mm Board Lens, 120°
	Dimension	92x136x12mm (WxHxD)
Mainbody	IP Rate	IPX3
	Installation	Wall Mounting Type



SHT-CN510

- Plastic color door camera

Specifications

Item	Contents	Description
Power	Input Power	DC12V/150mA (max)
	Power Consumption	90mA (MAX)
Camera	Sensor	1/3" CCD Color (320k Pixel)
	Lens	3.6mm Board Lens (92°)
	Dimension	92x136x12mm (WxHxD)
Mainbody	IP Rate	IPX1
	Imbedded Box	SHT-ZBX5C

Product Components

Monitor
SHT-3006XM, SHT-7507XM,SHT-7610XM, SHN-8610XM



SHT-CP611E

- Metal color door camera

Specifications

Item	Contents	Description
Power	Input Power	DC12V/150mA (max)
	Power Consumption	90mA (MAX)
Camera	Sensor	1/3" CCD Color (320k pixel)
	Lens	3.6mm Pinhole Lens (92°)
	Dimension	74 x 133 x 10mm (WxHxD)
Mainbody	IP Rate	IPX1
	Imbedded Box	SHT-ZBX5C

Product Components

Item	Monitor
SHT-CP611E	SHT-3006XM, SHT-3605PM, SHT-7610XM, SHT-7507XM SHN-8610XM

* SHT-CP611E interlock with Doorlock : Only SHT-3006XM/3507DM

Entrance Facility Products

Main Control Unit

	Main controller	Building distributor	Expandable Floor distributor	CCTV distributor
	SHT-5810XM	SHT-5820XB	SHT-5830XM	SHT-5840XM
Model				
Main function	- Site Controller connects to a maximum of - 40 Building Distributors (SHT-5820) - Can Also function as a Building Distributor	- Combine main entrance phones (Max 40) - Combine household monitors (Max 120) - Enable building distributor interlocking with main gate phone	Floor Distributor connects to a maximum of - 10 Households	CCTV Distributor connects to a maximum of - 6 CCTV Cameras
Installation quantity	1EA (In a site)		Max 60EA (with one building distributor)	Max 1EA (with one Building Distributor)
Input Power	DC 12V or DC 24V			
Power consumption	9W (Max)			
Dimension	142x205x32.7mm			

Floor Distributor Board




SHT-ZFT04/CN
SHT-ZFT10/CN

Specifications

Contents	Description
Output Power	DC 17V~24V
Operational Temperature	10°C~ +45°C
Transmission	RS-485 (BUS)
Dimension	220X 140X 20mm (WxHxD)

Video Intercom System configuration

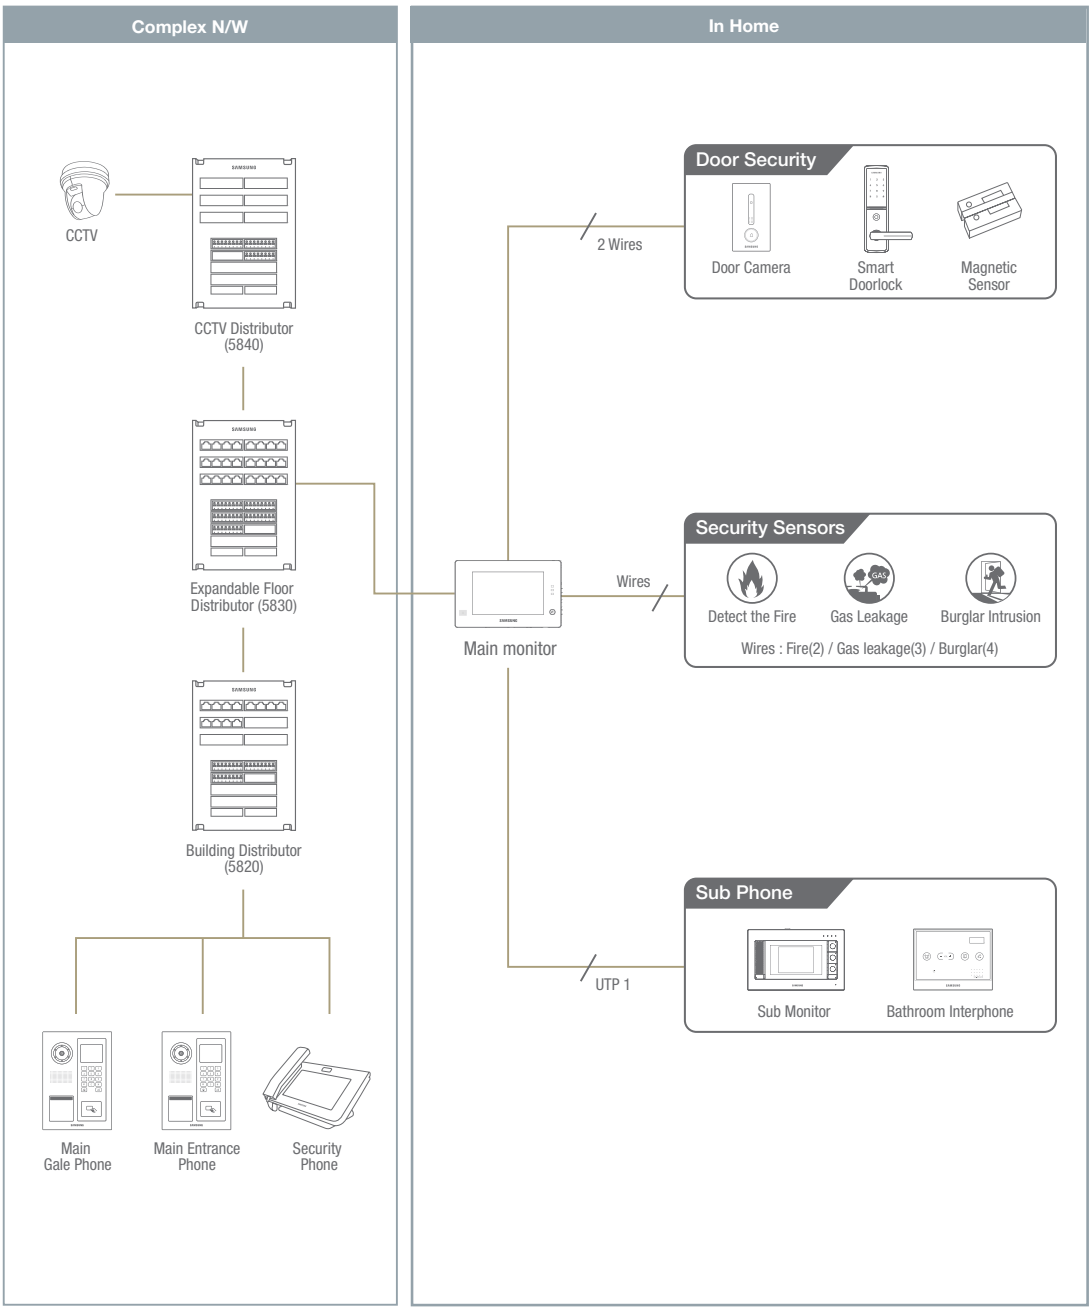

Optional Products

Sub Phone/Monitor



SHT-1100XB

- Door answering • Door release • Security
- Intercommunication with Guard office

Specifications

Contents	Description
Power	DC12V/ 300mA (max)
Dimension	99 x 214 x 55mm (WxHxD)
Weight	500g

Product Components

System
SHT-5800 System, SHT-5081NL System



SHT-IPE101

- Door answering • Door release
- Control Smart Door Lock

Specifications

Contents	Description
Power	DC12V/ 300mA (max)
Dimension	99 x 214 x 55mm (WxHxD)
Weight	500g

Product Components

Monitor
SHT-3006XM, SHT-3507DM, SHT-3605PM



SHT-7070EM

- Door answering & monitoring
- Door access control
- Emergency alarm
- Call to guard office
- Call to telephone

Specifications

Contents	Description
Power	DC 12V/1.2A, AC110~220V (50~60Hz)
Display	7" Color TFT LCD
Dimension	290 x 182 x 21mm (WxHxD)

Product Components

Monitor
SHN-8610, SHT-7610, SHT-7507

Bathroom Interphone



SHT-BEN320E/EN

- Door answering
- Door release
- Receiving call from guard office
- Emergency alarm
- Time display

Specifications

Contents	Description
Power	DC 12V, 300mA (max)
Dimension	148 x 115 x 10mm (WxHxD)
Weight	280g
Installation	Flush Mounting
Type	Hands-free Type

Product Components

Monitor
SHT-7610XM, SHT-7507XM, SHN-8610XM

Security Sensor



Gas leakage detector SHT-SGLD2/KR LN

- Standalone gas detector to detect leaking of city gas (LNG)
- Detect gas leakage within 20 Sec

Specifications

Contents	Description
Input Power	DC 9.5V ~ DC 13.5V
Output Power	DC 8V ~ DC 10V (Alarm)
Power Consumption	70mA (Alarm)
Detection Type	Spreading, Contact Spreading Type
Detection Speed	Within 20 Sec.
Volume of Alarm	More than 70dB
Density of Alarm	LNG 0.06 ~ 1.25%
Operational Temperature	-10 ~ +40
Type	96 x 62.8 x 48mm (WxHxD)



Magnetic entry sensor SHT-SBNC-N

Specifications

Contents	Description
Operational Voltage	No Power
Operation Type	Normal Closed Type
Operational Temperature	-10 ~ +60
Dimension	50 x 11 x 14mm (WxHxD)



Motion detector SHT-IRSD

- Detect the moving object with the infrared ray

Specifications

Contents	Description
Input Power	DC 9.5V ~ DC 13.5V
Operating Temperature Range	-10 ~ +50
Storage Temperature Range	-20 ~ +55
Material	ABS Resin
Weight	90g (Excl. Bracket)
Installation Location and Height	Indoor, 1.5m ~ 2.5m
Detection Range	3-D Detection: 11m x 10m / Surface Detection: 16m x 1.3m
Detection Area	3- Detection : 32 Sections (18 Sets) / Surface Detection : 12 Sections (6 Sets)

Video Door Phone Series

Indoor / Outdoor Units



AD-VHO4B

- 4" CRT Black and White
- Adjust Volume and Brightness
- Audio & Video Monitor of Outdoor Station
- Video Chat : Door Unlock, Handset



AD-VCO4

- 4" TFT LCD Colour Monitor
- Adjust Volume, Brightness, Contrast, Colour
- Audio & Video Monitor of Outdoor Station
- Video Chat : Door Unlock, Handsfree



AD-VCO7

- 7" TFT LCD Colour Monitor
- Adjust Volume, Brightness, Contrast, Colour
- Audio & Video Monitor of Outdoor Station
- Video Chat : Door Unlock, Handsfree



AD-VCTO7

- 7" TFT LCD Colour Monitor with Touch Features
- Adjust Volume, Brightness, Contrast, Colour
- Audio & Video Monitor of Outdoor Station
- Video Chat : Door Unlock, Handsfree



AD-VCTO7M

- 7" TFT LCD Colour Monitor with Touch Features
- Adjust Volume, Brightness, Contrast, Colour
- Inbuilt Memory (2GB), 400 Photos Saving Memory
- Audio & Video Monitor of Outdoor Station
- Video Chat : Door Unlock, Handsfree